

Our “Bend To Fit”, straight flex is stocked in 6’6” lengths ready for immediate shipping.
This lightweight polymer is capable of moderate radii (see chart below) to suit most applications.

FC & FP Series = Available in Straight 6’6” Lengths
SX Series = Available in Straight 8’ Lengths



NOT RECOMMENDED FOR INDIRECT LIGHTING APPLICATIONS

“BEND TO FIT”

PART # PROFILE	MIN. INSIDE RADIUS	MIN. OUTSIDE RADIUS	MIN. ARCH RADIUS
FLEXIBLE CORNICE MOULDINGS			
FC200	5’	5’	N/A
FC201	4’6”	4’6”	N/A
FC211	10’6”	10’6”	N/A
FC212	4’6”	4’6”	N/A
FC213	7’6”	7’6”	N/A
FC214	3’6”	3’6”	N/A
FC215	5’6”	5’6”	N/A
FC216	11’	11’	N/A
FC217	11’	11’	N/A
FC218	12’	12’	N/A
FC220	9’6”	9’6”	N/A
FC230	3’6”	3’6”	N/A
FC240	7’6”	7’6”	N/A
FC250	3’6”	3’6”	N/A
FC260	5’	5’	N/A
FC301	9’6”	9’6”	N/A
FC302	6’6”	6’6”	N/A
FC303	6’	6’	N/A
FC304	5’6”	5’6”	N/A
FC308	4’6”	4’6”	N/A
FC321	4’6”	4’6”	N/A
FC322	4’	4’	N/A
FC331	15’	15’	6’
FC333	12’	12’	N/A
FC334	13’6”	13’6”	N/A
FC402	6’	6’	N/A
FC602	4’6”	4’6”	6’
FC901	12’	12’	N/A
FC902	13’	13’	N/A

“BEND TO FIT”

PART # PROFILE	MIN. INSIDE RADIUS	MIN. OUTSIDE RADIUS	MIN. ARCH RADIUS
FLEXIBLE PANEL MOULDINGS			
FP1020	1’	1’	2’6”
FP2020	1’	1’	2’6”
FP3020	3’	3’	6’
FP4020	3’	3’	3’
FP5020	1’6”	1’6”	9’
FP5021	1’	1’	2’6”
FP6020	1’6”	1’6”	5’
FP7010	1’	1’	10’
FP7020	1’	1’	9’6”
FP7030	1’	1’	5’
FP7040	1’6”	1’6”	6’
FP7050	1’6”	1’6”	5’
FP7060	5”	5”	6’
FP7070	1’6”	1’6”	9’
FP8020	1’6”	1’6”	4’6”
FP8030	1’	1’	2’
FP8040	1’	1’	9’6”
FP8050	1’	1’	9’
FP8060	1’	1’	10’
FP9010	1’6”	1’6”	8’6”
FP9020	1’6”	1’6”	9’
FP9040	1’6”	1’6”	3’
FP9050	1’	1’	2’6”
FP9900	1’6”	1’6”	6’
FP9901	1’6”	1’6”	6’
FLEXIBLE BASE MOULDINGS			
SX105F	1’6”	1’6”	N/A
SX118F	1’6”	1’6”	N/A
SX155F	1’6”	1’6”	N/A

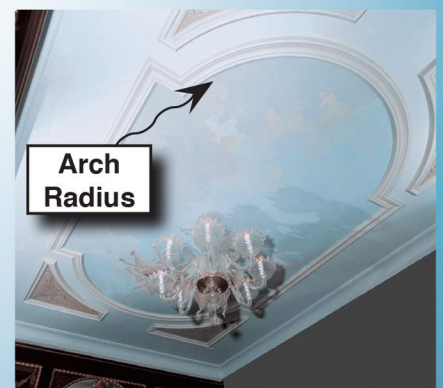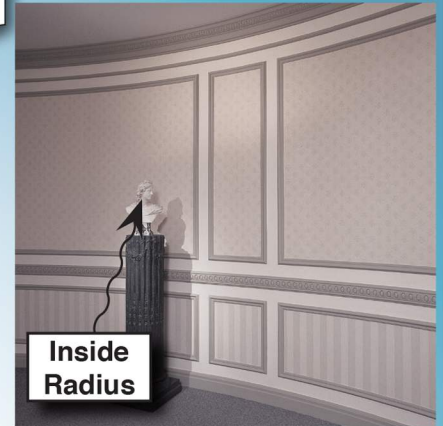

Above radii are the tightest curves capable without deformation of profile and excessive stress on mounting surfaces. We assume no responsibility for material when recommended radii is exceeded. It is best to paint mouldings after installation. See flexible installation page for proper installation procedures.

NOTE: Flexible mouldings may vary slightly in size (more on larger profiles) compared to rigid straight mouldings.